

Linear   **OSCO**
OPERATORS

VARIABLE SPEED SLIDE GATE OPERATORS

Model VS-GSLG

VS-GSLG VARIABLE SPEED INDUSTRIAL

- Up to 24"/sec. gate speed
- Soft start/soft stop
- Programmable speed control
- Direct C-face drive with brake
- #50 roller drive chain
- 1/2, 1, or 2 HP motor
- All voltages, single or three-phase
- Powder coat finish
- Post mount standard;
pad mount optional



All Models ETL Listed;
UL325 Compliant



Supporters and Proud Members of



ELECTRICAL

- Variable speed — soft start/stop programmable through variable frequency drive
- 1/2 to 2 HP industrial, continuous-duty, three-phase, 56-frame motors
- Double C-face brake
- Power on/off switch
- Duplex receptacle on 115 VAC units
- Three-button control station
- AC and DC power available for access control accessories and reversing devices
- Easily adjustable rotary limit switches

MECHANICAL

- Heavy-duty 10:1 right-angle C-face gear reducer
- #50 roller chain and sprockets
- Adjustable torque limiter
- Heavy-duty pillow-block bearings



VS-GSLG SERIES SLIDE GATE OPERATOR SPECIFICATIONS

Model	HP	Voltage-Single Phase (Voltage-Three Phase)	Maximum Gate Length	Maximum Gate Weight	Gate Speed	Shipping Weight
VS-GSLG-2	1/2	115/230 V (208/230/460 V)	45'	1100 lbs	up to 24"/sec	365 lbs
VS-GSLG-1	1	115/230 V (208/230/460 V)	78'	2500 lbs	up to 24"/sec	375 lbs
VS-GSLG-7	2	115/230 V (208/230/460 V)	100+'	4000 lbs	up to 24"/sec	400 lbs

1 Direct C-Face Motor-Brake-Gear Box Drive for smooth and dependable power transmission

2 Double C-Face Dual Disk Electromagnetic Brake

3 Solid-State Control Circuitry

- UL325/UL991 compliant control board
- Programmable variable speed controller for smooth gate operation and high gate speed

4 Heavy-Duty Components Adjustable torque limiter and heavy-duty pillow block bearings for smooth, reliable, quiet power transmission


5 Manual Disconnect

- Secure, easy, manual operation during power failure or emergency
- Optional remote cable kit for outside-the-gate access

6 Weather-Resistant Cabinet

- Galvannealed steel cabinet with powder coat finish
- Lockable, gasketed, hinged, and removable front cover

Dimensions

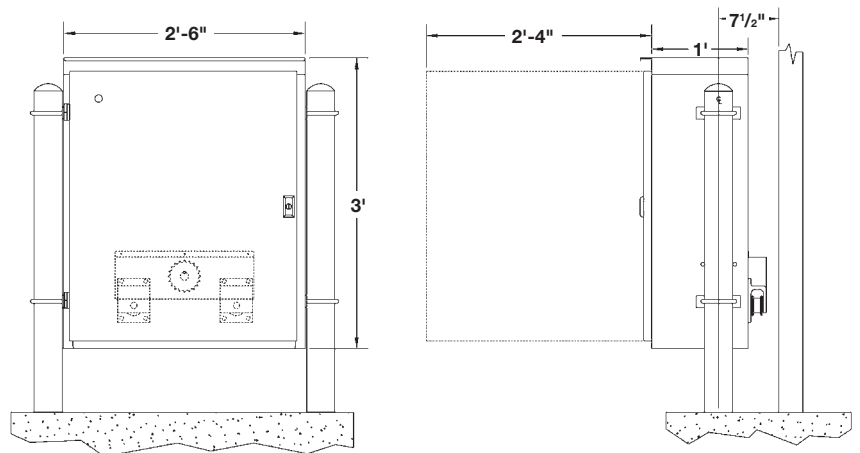

CAUTIONS



- Automatic gates not for pedestrians
- Automatic gate operators designed for vehicular traffic only; operators are powerful and can cause serious injury or death; DIRECT ALL PEDESTRIAN TRAFFIC TO SEPARATE PEDESTRIAN GATE
- UL325 requires use of contact or non-contact anti-entrapment devices
- ASTM F2200 requires that all exposed rollers are covered

Linear  **OSCO**
OPERATORS

LINEAR
(800) 421-1587 • www.linearcorp.com

OSCO, a subsidiary of Linear
(800) 333-1717 • www.operatorspecialty.com