

# SERIES M9900 EXIT DEVICE

RIM MOUNT



MARKS #	FUNCTION
M9900	Rim Panic
M9900F	Fire Rated Rim Panic
M9900 - 48	Rim Panic - 48"
M9900F - 48	Fire Rated Rim Panic - 48"


OPTIONS	
M9900	33" LENGTH FOR 36" DOOR
M9900 - 48"	42" LENGTH FOR 48" DOOR

SPECIFICATIONS
<ul style="list-style-type: none"> <li>• <b>Doors:</b> 1-3/4" thick standard.</li> <li>• <b>End cover:</b> Flush mounted beveled "Panic Protector" design.</li> <li>• <b>Strike:</b> Roller strike.</li> <li>• <b>Rail Assembly:</b> Extruded Aluminum, 32D finish.</li> <li>• <b>Dead latch Bolt:</b> Stainless Steel 3/4" throw.</li> <li>• <b>Dead latch Bolt:</b> Stainless Steel 5/8".</li> <li>• <b>Dogging feature:</b> Allen Key (M9900)</li> <li>• <b>UL listed:</b> For "Panic Hardware" and Fire Rated Model 3 hour fire doors up to 38" x 86".</li> <li>• <b>ANSI:</b> ANSI 156.3 (2001), requirements for Grade 1.</li> <li>• <b>3 Hour Fire Rating</b></li> <li>• <b>Finish:</b> 32D</li> </ul>

<ul style="list-style-type: none"> <li>• EXTRUSION HEAVY GAGE, 32D FINISH</li> <li>• LIFETIME MECHANICAL WARRANTY</li> </ul>	<ul style="list-style-type: none"> <li>• PANIC PROTECTOR™ END CAP</li> <li>• EASY INSTALLATION, ECONOMICAL</li> </ul>
--	---

Exit Devices

# SERIES M9900 VR EXIT DEVICE

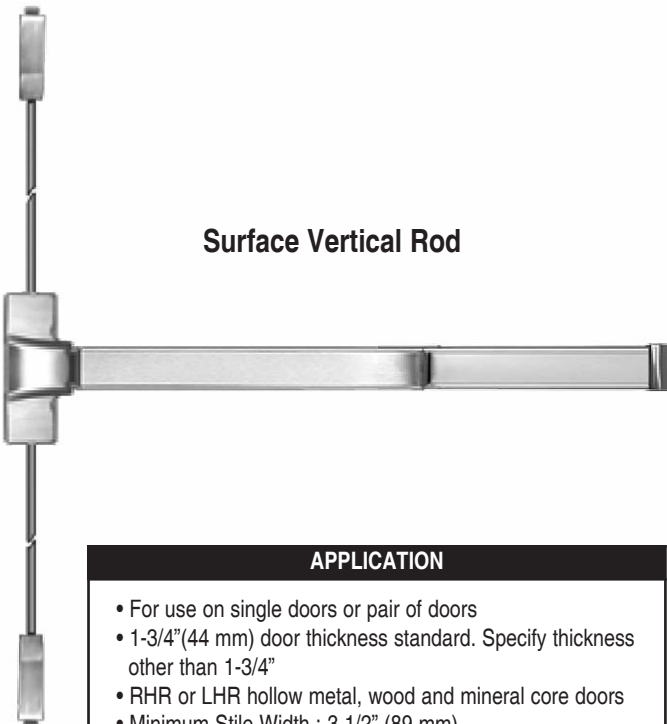

Surface Vertical Rod

APPLICATION
<ul style="list-style-type: none"> <li>• For use on single doors or pair of doors</li> <li>• 1-3/4" (44 mm) door thickness standard. Specify thickness other than 1-3/4"</li> <li>• RHR or LHR hollow metal, wood and mineral core doors</li> <li>• Minimum Stile Width : 3 1/2" (89 mm)</li> </ul>

32D FINISH
------------

MARKS #	FUNCTION
M9900 VR	Rim Panic Vertical Rod
M9900F VR	Fire Rated Rim Panic Vertical Rod
M9900 - 48 VR	Rim Panic Vertical Rod - 48"
M9900F - 48 VR	Fire Rated Rim Panic Vertical Rod - 48"

SPECIFICATIONS
<ul style="list-style-type: none"> <li>• <b>Device Head Cover:</b> Zinc alloy or stainless steel</li> <li>• <b>Chassis:</b> Steel, plated</li> <li>• <b>Mechanism Housing:</b> Extruded aluminum</li> <li>• <b>Push Bar Base:</b> Extruded aluminum</li> <li>• <b>Touch Plate:</b> Stainless steel</li> <li>• <b>End Cap:</b> Stainless steel</li> <li>• <b>Top Latch:</b> Stainless steel 37/64" (14.8mm)</li> <li>• <b>Top Strike:</b> Included</li> <li>• <b>Bottom Latch:</b> Stainless steel 37/64" (14.8mm)</li> <li>• <b>Bottom Strike:</b> Included</li> <li>• <b>Latch Case Covers:</b> Steel, stainless steel or brass</li> <li>• <b>Vertical Rods:</b> Aluminum tube</li> <li>• <b>Hand:</b> Non-handed</li> <li>• <b>Mounting:</b> Machine screws standard. Sex bolts optional. Order "SNB" for wood or unreinforced metal doors</li> <li>• <b>Dogging:</b> Allen-type key furnished</li> <li>• <b>Finish:</b> 32D</li> <li>• <b>Outside Trim:</b> Order separately</li> <li>• <b>Standard height:</b> For 7'0" doors</li> <li>• <b>UL Listed:</b> ANSI/BHMA Grade1 Panic Exit Hardware, 3-Hour Fire Rating</li> </ul>