
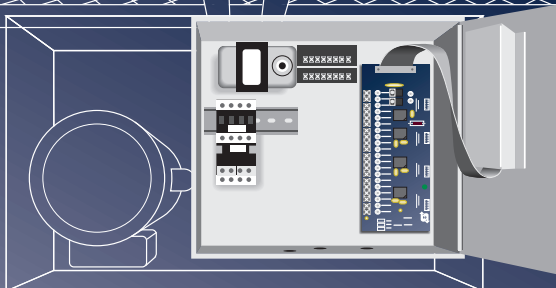
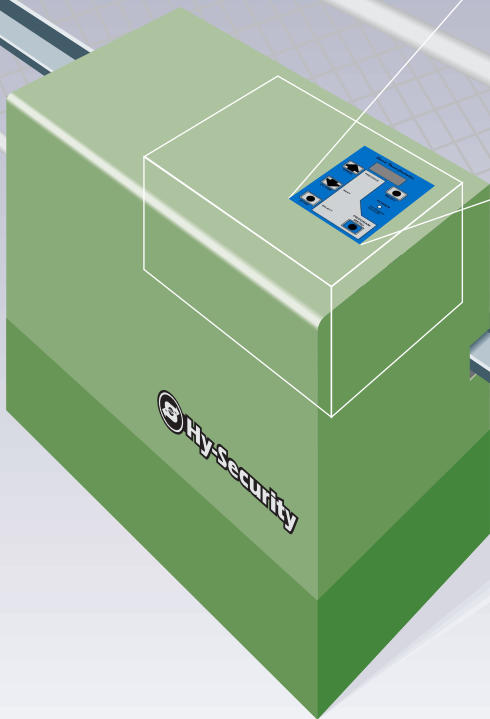


Hy-Security Gate Operators

SMART TOUCH

Features of the Smart Touch Controller

- Tested for full conformity to the latest UL991 / UL325 standards
- Listed for use all UL defined application classes (I – IV)
- Robust design in order to assure reliability
- Inherent entrapment sensor
- Built in “warm before operate” system
- Touch control in operator for installer use
- Liquid crystal display for reporting of functions and easy installer configuration
- Built in power surge/lightning strike protection
- Easy one wire input terminal connections and common wire buss
- Base model is loaded with features:
 1. Menu mode for installer configuration of many options
 2. Patented Anti-Tailgate mode
 3. Seventeen user inputs
 4. Three installer configurable outputs for many interface options
 5. Optional custom vehicle detectors that self selects loop frequency
 6. Event logging EEPROM for trouble shooting diagnostics
 7. Port for connection to laptop or other computer peripheral (RS232)
 8. Easy connection of Master/Slave systems (RS485)

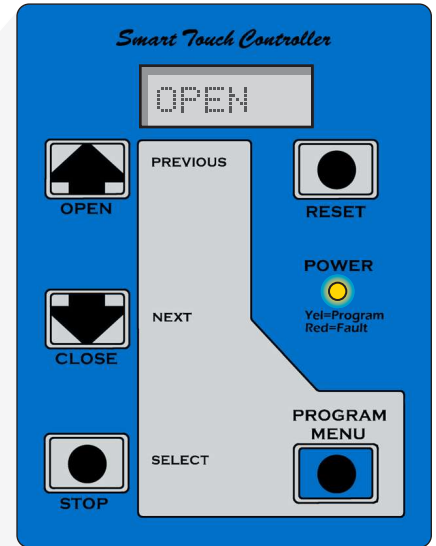

Hy-Security Gate Operators

Phone: 1-800-321-9947

Fax: (206) 286-0614

Internet: www.hy-security.com

E-mail: info@hysecurity.com

